


# HSF

LENGTH±TOLERANCE

P1 Male

P2 Male

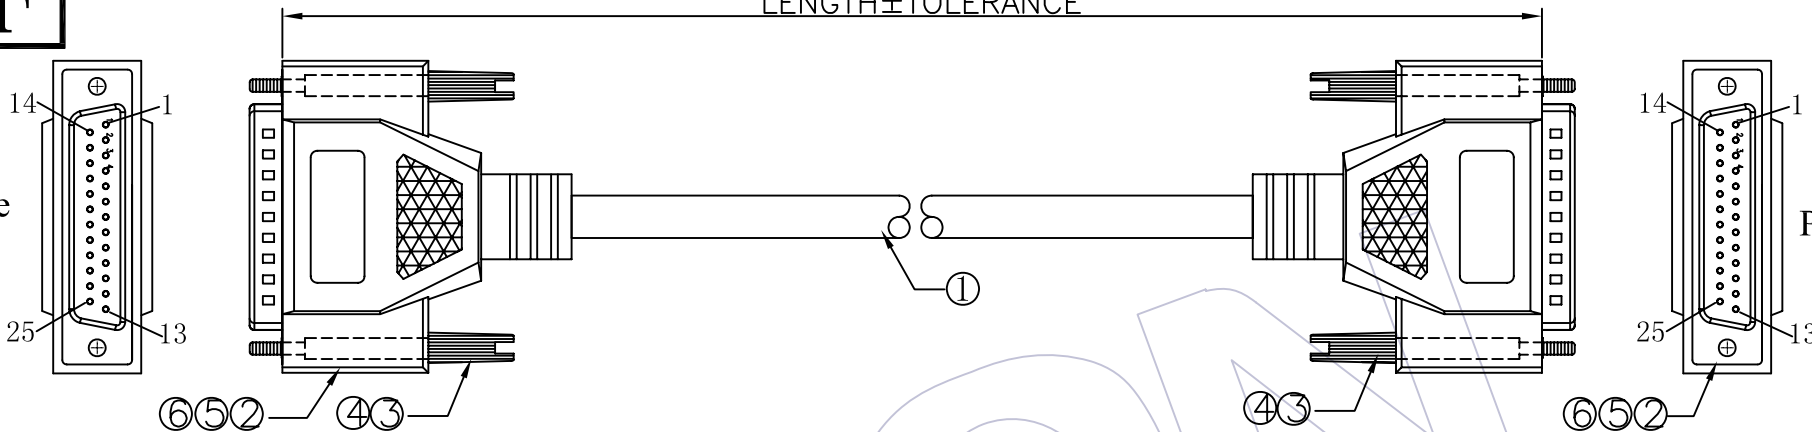

CONNECT METHOD

P1	P2	P1	P2
1	1	14	14
2	2	15	15
3	3	16	16
4	4	17	17
5	5	18	18
6	6	19	19
7	7	20	20
8	8	21	21
9	9	22	22
10	10	23	23
11	11	24	24
12	12	25	25
13	13	SHELL	SHELL

SPECIFICATIONS

Insulation Resistance:10MΩ Min  
 Contact Resistance:2.0Ω Max  
 Withstand Voltage:DC 300V, 10S  
 The Cable Assembly Must 100% Test

Wire SPEC	LENGTH	TOLERANCE
ULxxxx 22~30AWG	1~499	±5
	500~999	±10
	1000~1500	±15
	1501~3000	±20
	3001~5000	±30
	5001~	± Lx1%

Ordering Information

C9700 - 25 02 XXXX -101

No.of Pins:  
25P

Shape Style:  
02=Both ends Process

Length of Line

⑥	GPVC-B70XG01	Plastic	PVC 45P Black/Blue/Grey	0.026	KG
⑤	GPE-W00XG01	Plastic	PE WHITE	0.008	KG
④	GPVC-B60XG01	Plastic	PVC 35P Black/Blue/Grey	0.006	KG
③		Screw	4#-4UNC	4	PCS
②	6220-25MXXX01	D-SUB	DB25P MALE SOLDER TYPE Black/Blue	2	PCS
①	WXXX-XXXX00001	Cable	UL2464/2919 22~30AWG*25C+D+AL/MYLAR PVC Jacket Black/Beige/Grey	XXX	MM
NO.	Part No.	Name	specification	Q'TY	UNIT

				工程图 ENGINEERING	绘图 DRAW	BEN	09/11/02	SCALE	1:1	<b>WCON</b> 维峰五金电子有限公司 WAFE HARDWARE ELECTRONICS CO. LTD 料号 PART NO. C9700-2502XXXX-101 品名 TITLE: DB 25P Male TO DB25P Male 客户料号Customer NO.
				X.X	±0.30			UNIT	mm	
				X.XX	±0.20			SIZE	A4	
				X.XXX	±0.10			SHEET	1/1	
AO	09/11/02	NEW		Angle	± 2'			PROJ.	客户料号Customer NO.	
版次 REV	日期 DATE	变更说明 MODIFICATION DESCRIPTION	变更 CHANGE	核准 APPROVE	核准 APPROVE					