


HSF

P1 Male

P2 Male

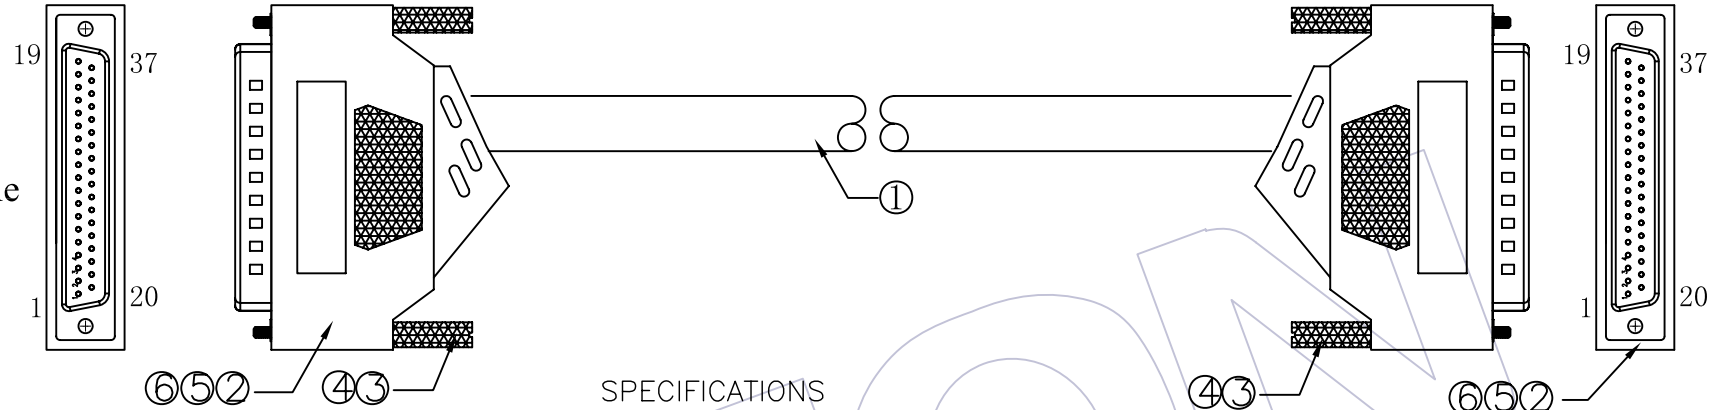

SPECIFICATIONS

Insulation Resistance: 10MΩ Min
 Contact Resistance: 2.0Ω Max
 Withstand Voltage: DC 300V, 10S
 The Cable Assembly Must 100% Test

CONNECT METHOD

P1	P2	P1	P2
1	1	20	20
2	2	21	21
3	3	22	22
4	4	23	23
5	5	24	24
6	6	25	25
7	7	26	26
8	8	27	27
9	9	28	28
10	10	29	29
11	11	30	30
12	12	31	31
13	13	32	32
14	14	33	33
15	15	34	34
16	16	35	35
17	17	36	36
18	18	37	37
19	19	SHELL	SHELL

Ordering Information

C9700 - 37 02 XXXX -001

No. of Pins: 37P Shape Style: 02=Both ends Process Length of Line

Wire SPEC	LENGTH	TOLERANCE
ULxxxx 22~30AWG	1~499	±5
	500~999	±10
	1000~1500	±15
	1501~3000	±20
	3001~5000	±30
	5001~	± Lx1%

⑥	GPVC-B70XG01	Plastic	PVC 45P Black/Blue/Grey	0.026	KG
⑤	GPE-W00XG01	Plastic	PE WHITE	0.008	KG
④	GPVC-B60XG01	Plastic	PVC 35P Black/Blue/Grey	0.006	KG
③		Screw	4#-4UNC	4	PCS
②	6220-37MXXXX01	D-SUB	DB37P MALE SOLDER TYPE Black/Blue	2	PCS
①	WXXX-XXXX00001	Cable	UL2464/2919 22~30AWG*37C+D+AL/MYLAR PVC Jacket Black/Beige/Grey	XXX	MM
NO.	Part No.	Name	specification	Q'TY	UNIT

						工程图 ENGINEERING	绘图 DRAW	BEN	09/11/02	SCALE	1:1	WCON 维峰五金电子有限公司 WAFE HARDWARE ELECTRONICS CO. LTD 料号 PART NO. C9700-3702XXXX-001 品名 TITLE: DB 37P Male TO DB37P Male 客户料号 Customer NO.
						X.X	±0.30			UNIT	mm	
						X.XX	±0.20			SIZE	A4	
						X.XXX	±0.10			SHEET	1/1	
A0	09/11/02		NEW			Angle	± 2'			PROJ.	客户料号 Customer NO.	
版次 REV	日期 DATE	变更说明 MODIFICATION DESCRIPTION		变更 CHANGE	核准 APPROVE	工程图 ENGINEERING	绘图 DRAW			SCALE		
						DIM	TOL					